

NOTE: FIELD REMOVE FOAM AND LINER AT CUTBACK


"GH-01" GUTTER HANGER AT  
 INTERIOR HI RIBS 40" O/C ATTACH  
 W/ (4) 1/4 - 14 X 7/8 STITCH TEKS  
 TO CENTER RIB OF CR3 PANEL

1/4 - 14 X 7/8 STITCH  
 TEKS 6" O/C

"BB-01" BIRD BLOCK  
 W/ 1/4 - 14 X 7/8" STITCH  
 TEK 12" O/C

"GT-01" GUTTER TRIM

"WC-01" PANEL CLIP W/  
 1/4 - 14 TEK 3 FASTENERS W/O  
 WASHER AT PANEL JOINT

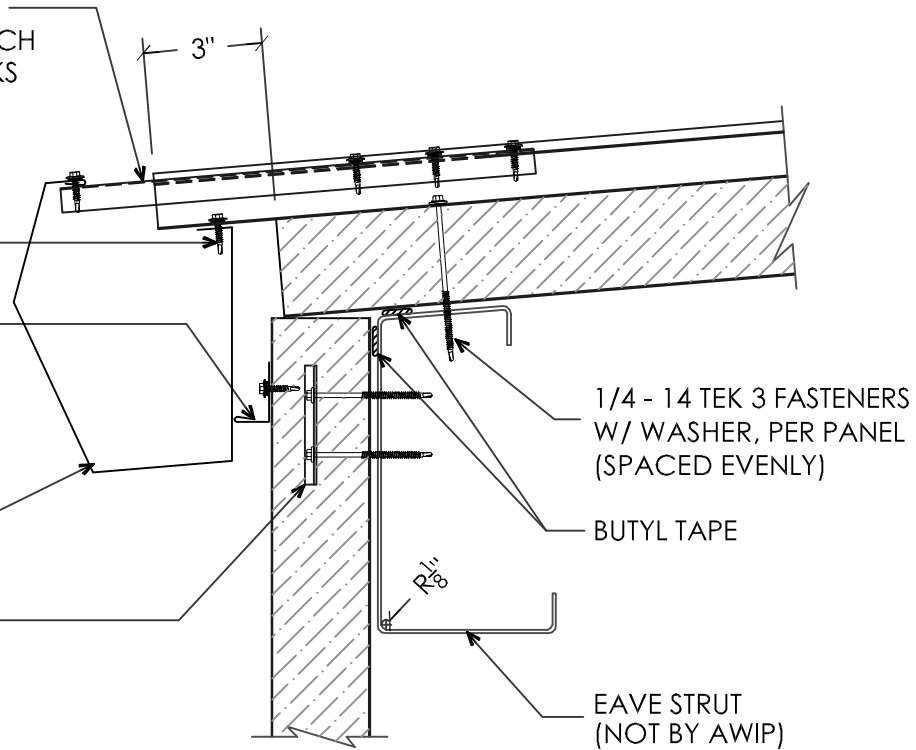

1/4 - 14 TEK 3 FASTENERS  
 W/ WASHER, PER PANEL  
 (SPACED EVENLY)

BUTYL TAPE

EAVE STRUT  
 (NOT BY AWIP)

FASTENING SCHEDULE WILL VARY  
 DEPENDING ON SPECIFIC APPLICATION

**EAVE W/ GUTTER**  
 (SECTION VIEW)



929 ALDRIDGE ROAD, VACAVILLE, CA 95688  
 PHONE: (707) 359-2280 FAX: (707) 359-2286

|                |                     |           |
|----------------|---------------------|-----------|
| DETAIL:        | EAVE WITH GUTTER    |           |
| APPLICATION:   | CR3 ROOF ASSEMBLIES |           |
| DATE: 04/10/09 | JOB NO:             | XXXXXXXXX |
| DRAWN: CLR     | SHEET:              | 1 OF 1    |