


USE POWER NIBBLERS AND CUT OFF BUTTING JOINT RIB AT EACH SIDE OF ROOF PANEL FOR PROPER ENGAGEMENT OF UPPER COURSE OF OVERLAPPING CR-2 OR CR-3 ROOF PANEL



NOTE: CONTRACTOR SHOULD REMOVE FOAM FROM LONGITUDINAL OVERLAPPING IN FIELD. EXTRA CARE SHOULD BE TAKEN TO REMOVE FOAM CLEANLY FROM METAL DIRECTLY OVER BUTYL TAPE SEALANT.

OVERLAP PREPARATION
(ISOMETRIC VIEW)

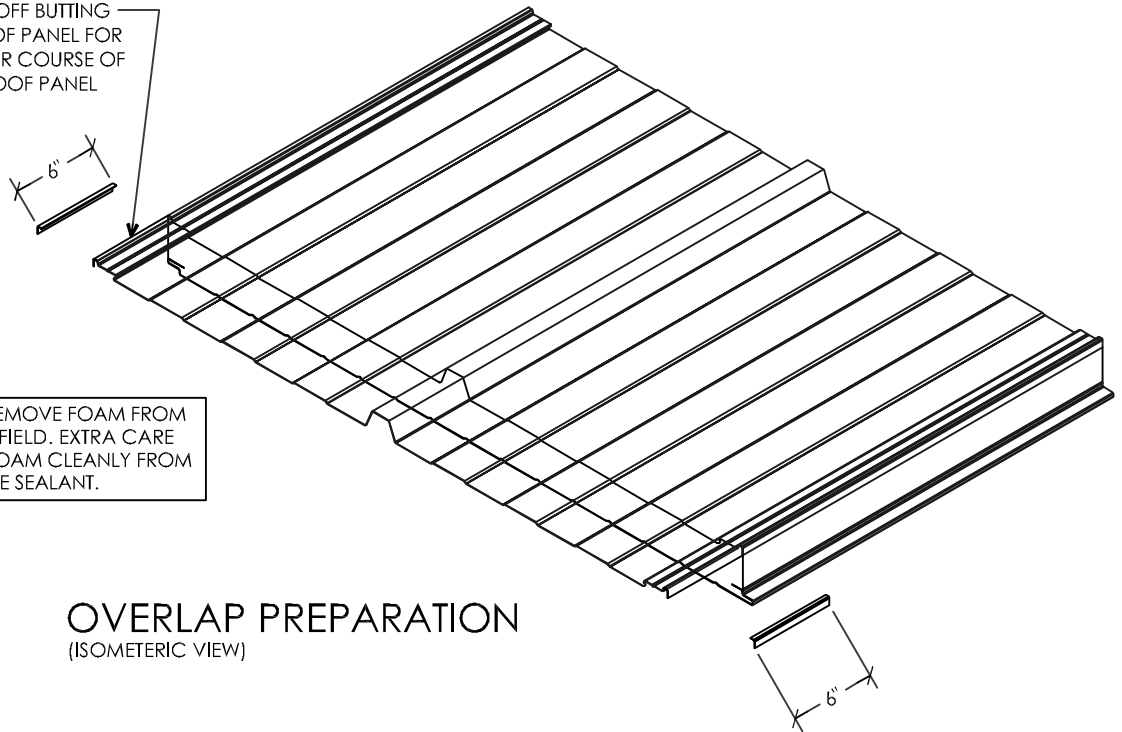

929 ALDRIDGE ROAD, VACAVILLE, CA 95688
PHONE: (707) 359-2280 FAX: (707) 359-2286

DETAIL: OVERLAP PREPARATION	
APPLICATION: CR3 ROOF ASSEMBLIES	
DATE: 04/10/09	JOB NO: XXXXXXXX
DRAWN: CLR	SHEET: 1 OF 1