

NOTE: FIELD REMOVE FOAM AND LINER AT CUTBACK.

FIELD-FILL W/ COMPRESSIBLE INSULATION
(NOT BY IMP SUPPLIER)

"GS-02S" GUTTER HANGER
20" O/C W/ (5) $\frac{1}{4}$ " - 14 x $\frac{7}{8}$ "
STITCH TEKS

"GT-__S" GUTTER TRIM

SR_ INSIDE CLOSURE
STRIP W/ 1" x $\frac{3}{16}$ " BUTYL
TAPE SEALANT AT TOP &
BOTTOM

$\frac{1}{4}$ " - 14 $\frac{7}{8}$ " STITCH TEKS
6" O/C

"BB-01" BIRD BLOCK W/
 $\frac{1}{4}$ " - 14 x $\frac{7}{8}$ " STITCH TEK 12" O/C


"WC-01" PANEL CLIP W/
(\square) $\frac{1}{4}$ " - 14 x $\frac{1}{2}$ " TEK 3 W/O
WASHER AT PANEL JOINT

BUTYL SEALANT AT
VERTICAL JOINT

EAVE STRUT
(NOT BY IMP SUPPLIER)

EAVE W/ GUTTER

(SECTION VIEW)

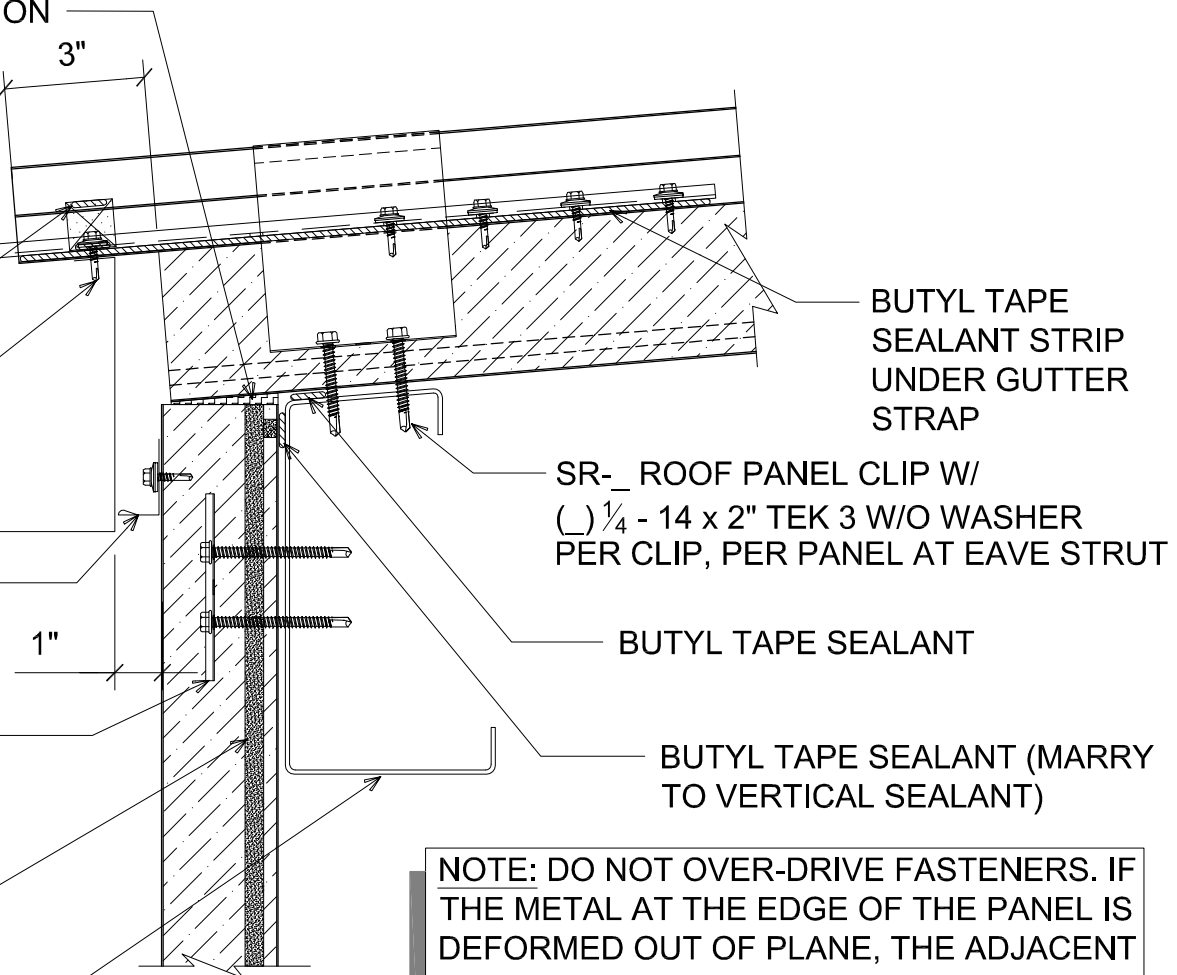

NOTE: DO NOT OVER-DRIVE FASTENERS. IF THE METAL AT THE EDGE OF THE PANEL IS DEFORMED OUT OF PLANE, THE ADJACENT PANEL WILL BE DIFFICULT TO ENGAGE AND WILL NOT SEAM. AFTER SR CLIP HAS BEEN INSTALLED OVER MALE LEG OF STANDING SEAM PANEL, PRE-CRIMP, USING $\frac{1}{2}$ " HAND CRIMPING TOOL.

DETAIL: **EAVE WITH GUTTER**

929 ALDRIDGE ROAD
VACAVILLE, CA 95688
TEL: (707) 359-2280
FAX: (707) 359-2286
WWW.AWIPANELS.COM

ALL WEATHER
INSULATED PANELS



APPLICATION:
SR ROOF, COMMERCIAL & INDUSTRIAL
AWIP DETAIL NUMBER:
SRR-ACH-EG-001

DATE:
06/20/19

SHEET:

DRAWN BY:
MMF

1 OF 1