


# MV40 Wall Panels

MV40 *micro vee* profile wall panels are ideal for interior walls, ceilings and partitions on industrial, food processing and cold storage facilities. The 40" wide panel installs quickly and economically. Fasteners are concealed within the panel side joint and the micro vee profile breaks up the flat expanse of metal without creating areas where residue could get trapped in manufacturing environments.



## FEATURES AND BENEFITS

- The panel's double tongue and groove joint is self-aligning and weather tight and allows for sealant application at either the interior or exterior side of the panel joinery depending on the direction of vapor drive.
- The standard metal surface is 26ga galvanized steel with composite polyester or ceramic exterior coatings (PVDF coatings available).
- The panel arrives on site in one piece and requires a simple one step installation, reducing construction time and costs.

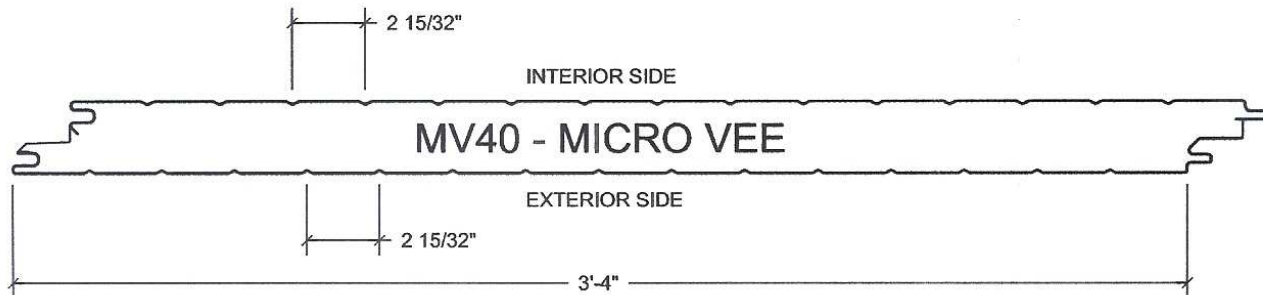

## PRODUCT PARAMETERS

Panel Thickness	2"	2.5"	3"	4"	5"	6"
Insulating Values	16	20	24	32	41	50
Panel Width	40"					
Panel Length	from 8' to 56' maximum					
Insulation Material	CFC free foamed-in-place isocyanurate foam 2.2 to 2.5 pcf density					
Joint Configuration	off set tongue and groove with concealed fastener					
Metal facings	26 ga galvanized steel (22, 24 ga available)					
Coatings	polyester, ceramic, PVDF, plastisol					
Accessories	fasteners, concealed fastener clip, sealants, brake formed flashings					



ALL WEATHER INSULATED PANELS