


FIELD APPLIED NON-SKINNING BUTYL SEALANT EXTERIOR SIDE

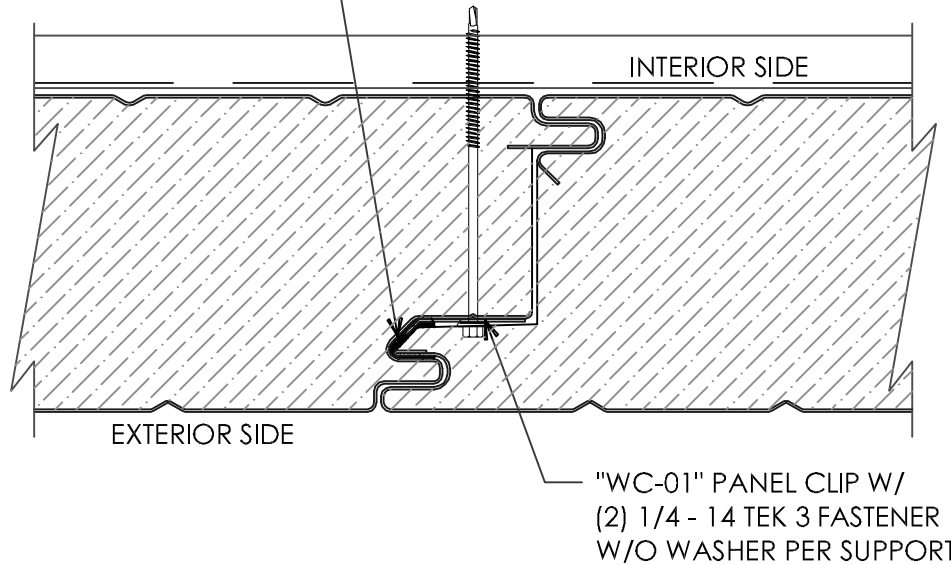

"WC-01" PANEL CLIP W/
(2) 1/4 - 14 TEK 3 FASTENER
W/O WASHER PER SUPPORT

NOTE: FILL EXTERIOR SIDE OF FEMALE JOINT CONTINUOUSLY WITH APPROXIMATE 1/2" DIAMETER BEAD OF NON-SKINNING BUTYL SEALANT. (DO NOT UNDER FILL)

PANEL JOINT

(PLAN VIEW)



ALL WEATHER INSULATED PANELS

929 ALDRIDGE ROAD
VACAVILLE, CA 95688
PHONE: (707) 359-2280
FAX: (707) 359-2286
WWW.AWIPANELS.COM

| | | |
|----------------|-------------------------|------------|
| DETAIL: | PANEL JOINT | |
| APPLICATION: | COMMERCIAL & INDUSTRIAL | |
| DATE: 03/06/07 | JOB NO: | XXXXXXXXXX |
| DRAWN: CLR | SHEET: | 1 OF 1 |