


FIELD APPLIED NON-SKINNING BUTYL SEALANT BOTH SIDES

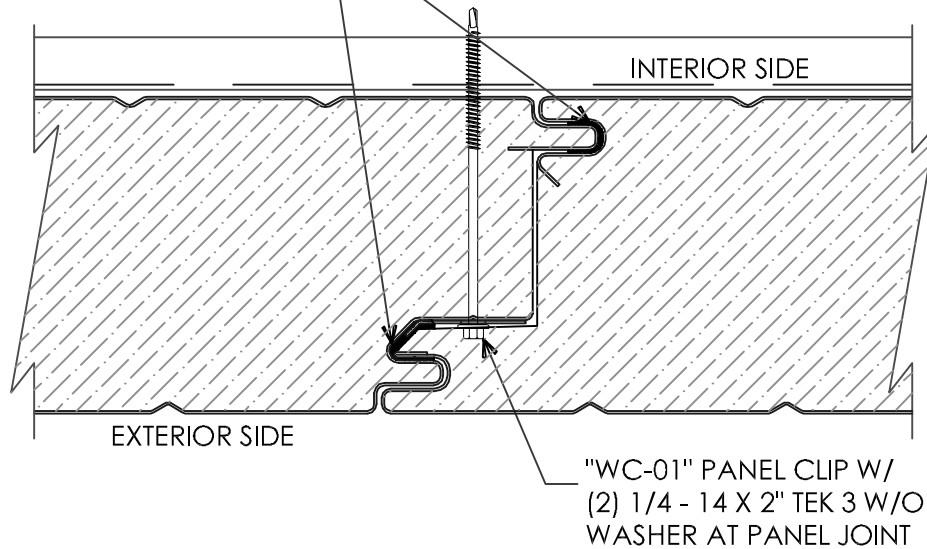

NOTE: FILL BOTH SIDES OF FEMALE JOINT CONTINUOUSLY WITH APPROXIMATE 1/2" DIAMETER BEAD OF NON-SKINNING BUTYL SEALANT. (DO NOT UNDER FILL)

## PANEL JOINT (ALASKA)

(PLAN VIEW)



ALL WEATHER INSULATED PANELS

929 ALDRIDGE ROAD  
VACAVILLE, CA 95688  
PHONE: (707) 359-2280  
FAX: (707) 359-2286  
WWW.AWIPANELS.COM

DETAIL:	PANEL JOINT (ALASKA)	
APPLICATION:	COMMERCIAL & INDUSTRIAL	
DATE: 03/06/07	JOB NO:	XXXXXXXXXX
DRAWN: CLR	SHEET:	1 OF 1