



FL40 Wall Panels

FL40 *flat* wall panels are ideal for exterior horizontal or vertical wall applications where a flat, smooth "hi-tech" surface appearance is desired. The 40" wide panel installs quickly and economically. Fasteners are concealed within the panel side joint.

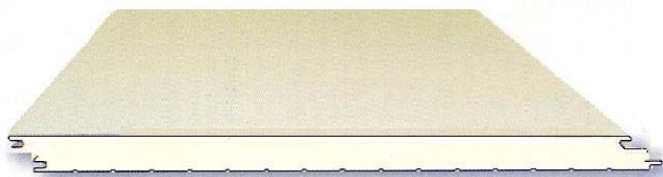

FEATURES AND BENEFITS

- The panel's double tongue and groove joint is self-aligning and weather tight and allows for sealant application at either the interior or exterior side of the panel joinery depending on the direction of vapor drive.
- The standard metal surface is 22ga G-90 galvanized steel with composite polyester or ceramic exterior coatings (35 year PVDF coatings available).
- The panel arrives on site in one piece and requires a simple one step installation, reducing construction time and costs.

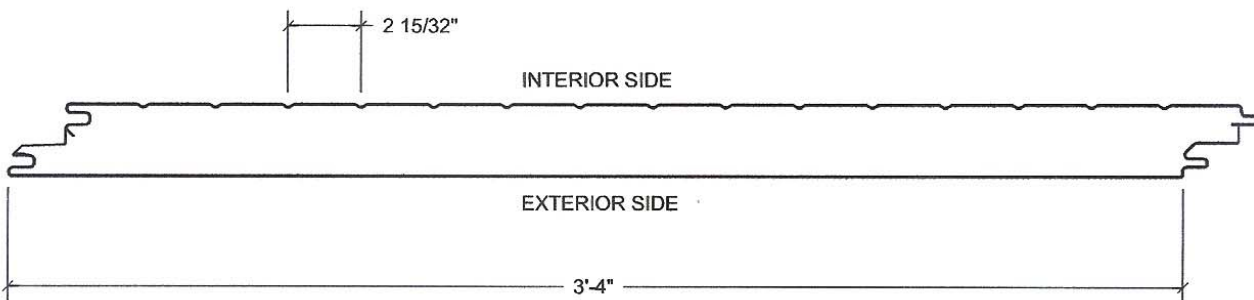

PRODUCT PARAMETERS

Panel Thickness	2"	2.5"	3"
Insulating Values(R)	16	20	24
Panel Width	40"		
Panel Length	from 8' to 30' maximum		
Insulation Material	CFC free foamed-in-place isocyanurate foam 2.2 to 2.5 pcf density		
Joint Configuration	off-set tongue and groove with concealed fastener		
Metal Facings	22ga galvanized steel		
Coatings	Ceramic, PVDF		
Accessories	fasteners, concealed fastener clip, brake formed flashings		



ALL WEATHER INSULATED PANELS

