


HE40-A AdobeTexture™ Wall Panels

HE40-A *AdobeTexture*™ factory finish coated wall panels offer a low gloss multi-textured profile and finish system that simulates an earth tone troweled stucco style appearance. This unique process eliminates the need for additional factory or field applied stucco coatings and offers far superior adhesion and color retention. Typical trim matching and finishing issues common to sprayed elastomeric applications are also avoided with the *AdobeTexture*™ factory finish coating system.



FEATURES AND BENEFITS

- The panel's double tongue and groove joint is self-aligning and weather tight and allows for sealant application at either the interior or exterior side of the panel joinery depending on the direction of vapor drive.
- The standard exterior metal surface is 26 ga G-90 Galvanized or AZ 50 Galvalume steel with a low gloss 25 year textured ceramic exterior coating.
- The panel arrives on site in one piece and requires a simple one step installation reducing construction time and costs.
- HE40A *AdobeTexture*™ wall panels are very economical when compared with factory or field elastomeric coated wall panels.

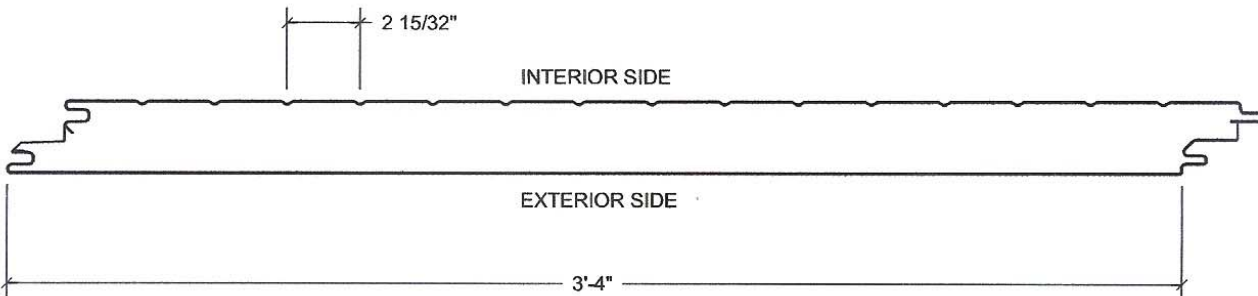

PRODUCT PARAMETERS

| | | | | |
|----------------------|---|------|----|----|
| Panel Thickness: | 2" | 2.5" | 3" | 4" |
| Insulating Values(R) | 16 | 20 | 24 | 32 |
| Panel Width | 40" | | | |
| Panel Length | from 8' to 56' maximum | | | |
| Insulation Material | CFC free polyurethane foam 2.2 to 2.5 pcf density | | | |
| Joint Configuration | off-set tongue and groove with concealed fastener | | | |
| Metal facings | 26ga galvanized steel | | | |
| Coating | 25yr factory low gloss and textured Ceramic Pigmented Polyester | | | |
| Accessories | fasteners, concealed fastener clip, brake formed flashings | | | |

