



HE40 Wall Panels

HE40 *heavy embossed* profile wall panels are ideal for exterior walls on industrial and commercial facilities. The 40" wide panel installs quickly and economically. Fasteners are concealed within the panel side joint and the heavy embossed pattern allows for field application of stucco style elastomeric coatings.

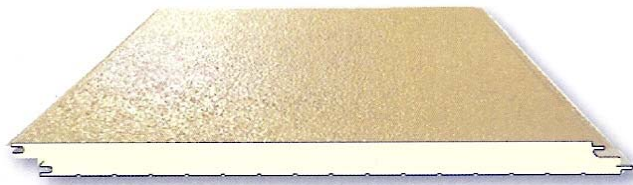

FEATURES AND BENEFITS

- The panel's double tongue and groove joint is self-aligning and weather tight and allows for sealant application at either the interior or exterior side of the panel joinery depending on the direction of vapor drive.
- The standard metal surface is 26 ga G-90 galvanized steel with composite polyester or ceramic exterior coatings (PVDF coatings available).
- The panel arrives on site in one piece and requires a simple one step installation, reducing construction time and costs.

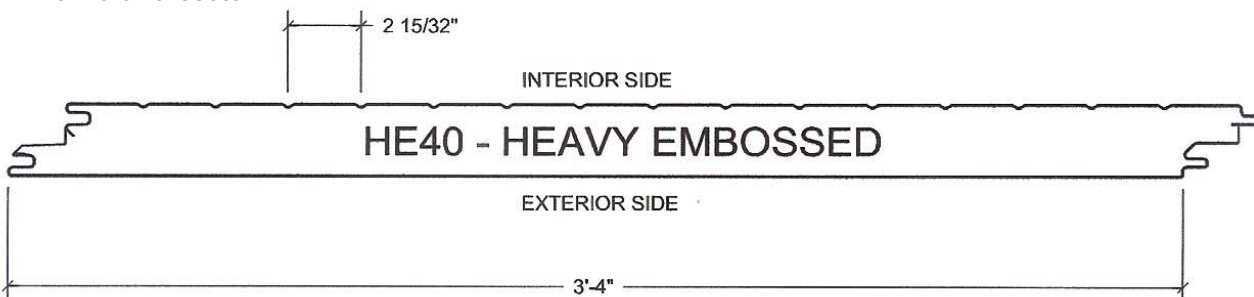

PRODUCT PARAMETERS

Panel Thickness	2"	2.5"	3"	4"
Insulating Values(R)	16	20	24	32
Panel Width	40"			
Panel Length	from 8' to 56' maximum			
Insulation Material	CFC free foamed-in-place isocyanurate foam 2.2 to 2.5 pcf density			
Joint Configuration	off-set tongue and groove with concealed fastener			
Metal facings	26 ga galvanized steel (22,24 ga available)			
Coatings	polyester, ceramic, PVDF, plastisol			
Accessories	fasteners, concealed fastener clip, brake formed flashings			



ALL WEATHER INSULATED PANELS

