


HR3 Roof and Wall Panels


All Weather HR3 roof and wall panels are an ideal solution to field assembled high rib roof and wall applications.

The 40" wide panel installs quickly and economically.

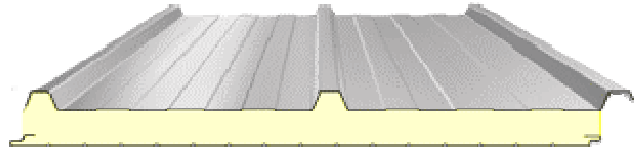

FEATURES AND BENEFITS

- The panel's overlapping joint is self-aligning and allows for easy sealant application at the panel joinery.
- The standard metal surface is 26ga G-90 galvanized steel with composite polyester or ceramic exterior coatings (PVDF coatings available).
- The panel arrives on site in one piece and requires a simple one step installation reducing construction time and costs.

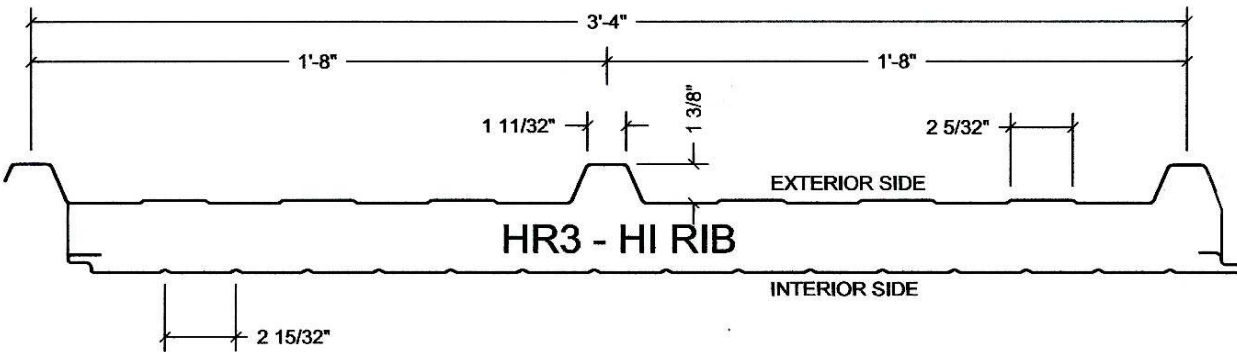

PRODUCT PARAMETERS

| | | | | | |
|-----------------------|--|----|----|----|----|
| Panel Thickness: | 2.5" | 3" | 4" | 5" | 6" |
| Insulating Values (R) | 21 | 24 | 33 | 42 | 50 |
| Panel Width | 40" | | | | |
| Panel Length | from 8' to 56' maximum | | | | |
| Insulation Material | CFC free foamed in place isocyanurate foam 2.2 to 2.5 pcf density | | | | |
| Joint Configuration | overlapping with exposed fasteners and saddle clips | | | | |
| Metal facings | 26ga galvanized steel (22ga, 24ga available) | | | | |
| Coatings | polyester, ceramic, PVDF | | | | |
| Accessories | fasteners, saddle fastener clips, sealants, brake formed flashings | | | | |



ALL WEATHER INSULATED PANELS