



FIELD-APPLIED NON-SKINNING BUTYL SEALANT AT WARM SIDE

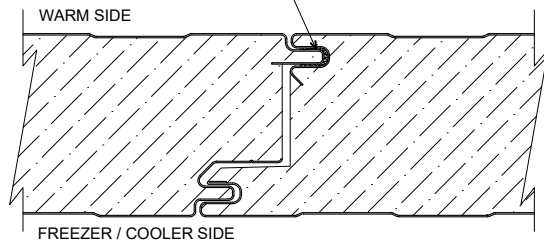

NOTE: FILL WARM SIDE FEMALE JOINT WITH $\frac{3}{8}$ " DIAMETER BEAD (APPROXIMATE) OF NON-SKINNING BUTYL SEALANT (DO NOT UNDER-FILL).

FILL WARM SIDE CAVITY WITH $\frac{3}{8}$ " DIAMETER BEAD (APPROXIMATE) OF NON-SKINNING BUTYL SEALANT (DO NOT UNDER-FILL).

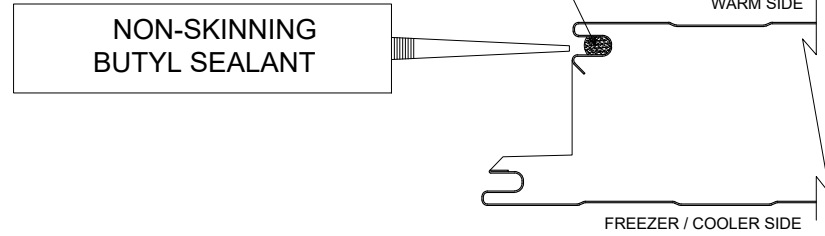

SEALANT PLACEMENT AT PANEL JOINT (PLAN VIEW - LINER; SECTION VIEW - CEILING)

PANEL JOINT - PARTITION

(PLAN VIEW - LINER; SECTION VIEW - CEILING)

DETAIL:

PANEL JOINT

APPLICATION:
PARTITION WALL, CEILING, AMBIENT, COOLER, FREEZER
AWIP DETAIL NUMBER:
APC-AIICIF-PJ-001

DATE:
12/21/21
DRAWN BY:
MMF

SHEET:
1 OF 1

929 ALDRIDGE ROAD
VACAVILLE, CA 95688
TEL: (707) 359-2280
FAX: (707) 359-2286
WWW.AWIPANELS.COM

