

FILL GAP CONTINUOUSLY WITH TWO-PART FOAMED-IN-PLACE URETHANE; FOR DRY, MILD CLIMATES COMPRESSIBLE INSULATION MAY BE USED (NOT BY IMP SUPPLIER)

1/4 - 14 x 7/8" STITCH TEK AT EACH HIGH


"OR-02" OUTSIDE RIDGE

"IR-01" INSIDE RIDGE W/ #10 x 3/4" PPH 12" O/C

BUTYL TAPE SEALANT

"CW-01" CONVEX BONDED SEAL WASHER W/ 1/4 - 14 x _ TEK 3 FASTENER W/ WASHER INTO SUPPORT MEMBER (PILOT HOLE RECOMMENDED; SEE ROOF FASTENING LAYOUT)

SECONDARY FRAMING BY OTHERS (NOT BY IMP SUPPLIER)

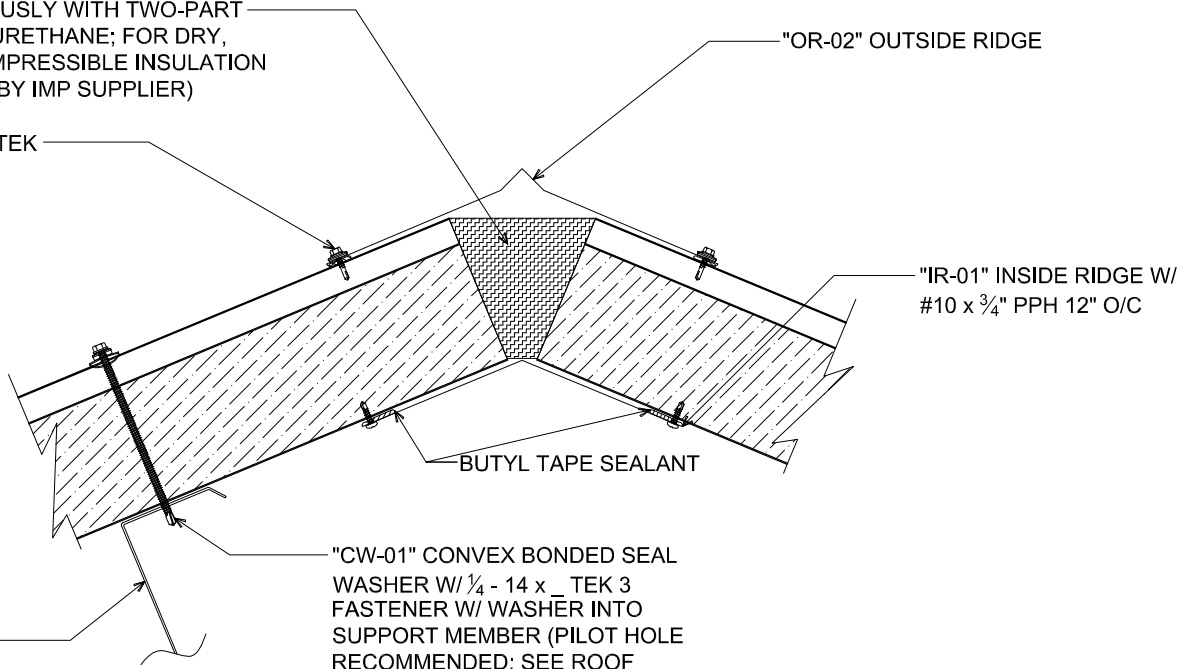

RIDGE APEX (SLOPE ≥ 5:12)
(SECTION VIEW)

DETAIL:

RIDGE APEX

APPLICATION:
CW36 ROOF, COMMERCIAL & INDUSTRIAL
AWIP DETAIL NUMBER:
CWR-ACI-RA-001

929 ALDRIDGE ROAD
VACAVILLE, CA 95688
TEL: (707) 359-2280
FAX: (707) 359-2286
WWW.AWIPANELS.COM



DATE: 05/28/20
DRAWN BY: MMF

SHEET: 1 OF 1