

**NOTE: FIELD REMOVE FOAM AND LINER AT CUTBACK.**

FIELD-FILL W/ COMPRESSIBLE INSULATION  
(NOT BY IMP SUPPLIER)

"GS-02S" GUTTER HANGER  
20" O/C W/ (5) 1/4 - 14 x 0.88"  
HWH DP1

SR\_INSIDE  
CLOSURE STRIP W/  
3/4" x 3/32" BUTYL  
TAPE SEALANT AT  
TOP & BOTTOM

"GT\_S"  
GUTTER TRIM


1/4 - 14 x 0.88" HWH DP1 6" O/C

"BB-01" BIRD BLOCK W/  
1/4 - 14 x 0.88" HWH DP1 12" O/C

"WC-01" PANEL CLIP W/  
( ) 1/4 - 14 x HWH DP3 W/O  
WASHER AT PANEL JOINT

BUTYL SEALANT AT  
VERTICAL JOINT


EAVE STRUT  
(NOT BY IMP SUPPLIER)

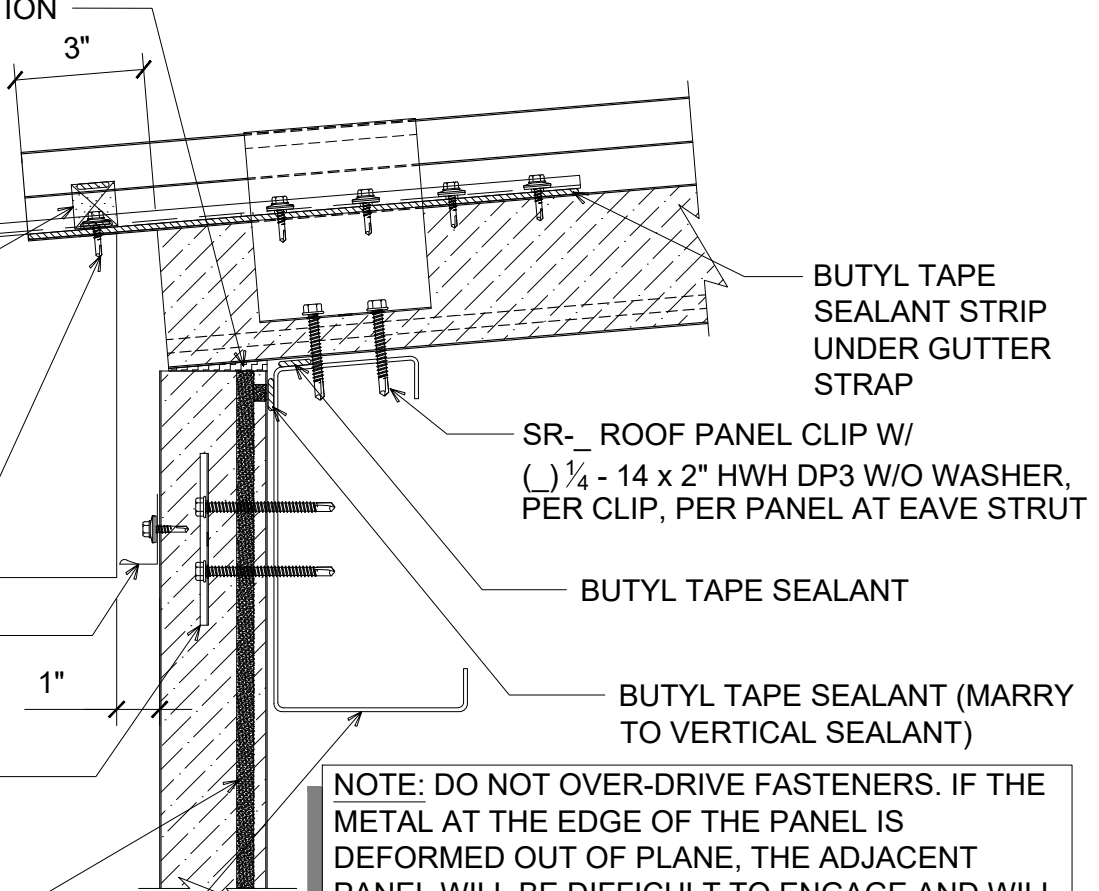

**NOTE: DO NOT OVER-DRIVE FASTENERS. IF THE METAL AT THE EDGE OF THE PANEL IS DEFORMED OUT OF PLANE, THE ADJACENT PANEL WILL BE DIFFICULT TO ENGAGE AND WILL NOT SEAM. AFTER SR CLIP HAS BEEN INSTALLED OVER MALE LEG OF STANDING SEAM PANEL, PRE-CRIMP, USING 1/2" HAND CRIMPING TOOL.**

# # EAVE W/ GUTTER

(SECTION VIEW)



DETAIL: <b>EAVE WITH GUTTER</b>	SHEET: 1 OF 1
	DATE: 11/15/24 DRAWN BY: MMF
APPLICATION: SR ROOF, COMMERCIAL & INDUSTRIAL	
AWIP DETAIL NUMBER: SRR-ACI-EG-001	

929 ALDRIDGE ROAD  
VACAVILLE, CA 95688  
TEL: (707) 359-2280  
FAX: (707) 359-2286  
WWW.AWIPANELS.COM

**All Weather**  
Insulated Panels

**AWIP**