



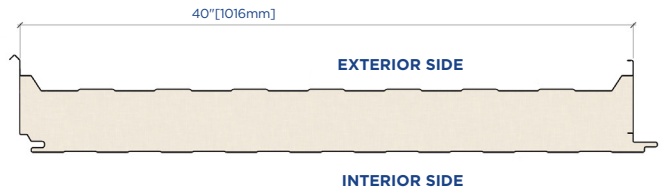

Features & Benefits

- Field seamed, hidden fastener joinery provides clean appearance and protection against the elements
- Weathertight design for use in both retrofit or new construction applications
- Composite panel simplifies design, reduces complexity, improves efficiency and reduces installation costs
- Single component roof design includes exterior aesthetic, weather barrier, insulation and vapor barrier

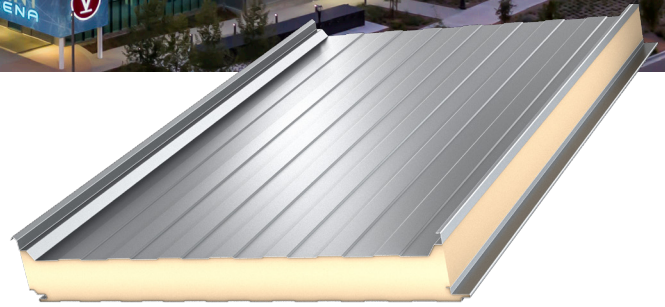

Product Specifications

| | | | | |
|--|--|-------------------------------------|------------|------------|
| Profile | Exterior | Smooth | | |
| | Interior | Embossed, Lightly Planked, Mesa Rib | | |
| Exterior Face Skin | 26 Gauge G90 Galvanized or AZ50 Galvalume. 24 and 22 Gauge optional | | | |
| Interior Face Skin | 26 Gauge G90/AZ50, Optional Gauges: 24 and 22 G90/AZ50, 26 304 2B Stainless Steel | | | |
| Slope Requirements* | Minimum 1/2: 12 | | | |
| Panel Module** | 40" [1016mm] | | | |
| Lengths** | Minimum: 8' [2.44m], Maximum: 50' [15.24m] | | | |
| Side Lap | Exterior: Standing Seam Interior: Tongue and Groove | | | |
| GWP± | 5.6 to 10.5 Lb CO ₂ eq/ft ² [27.4 to 51.3 kg CO ₂ eq/m ²] | | | |
| Thermal Performance[†] | | | | |
| Thickness | 3.25" [82mm] | 4" [102mm] | 5" [127mm] | 6" [125mm] |
| R-Value @ 75°F mean (°F·ft²·h/BTU) | 23 | 28 | 36 | 43 |
| U-Value @ 75°F mean (BTU/°F·ft²·h) | 0.043 | 0.035 | 0.028 | 0.024 |
| R-Value @ 35°F mean (°F·ft²·h/BTU) | 26 | 32 | 41 | 49 |
| U-Value @ 35°F mean (BTU/°F·ft²·h) | 0.038 | 0.031 | 0.025 | 0.021 |

* Contact AWIP for Custom Slope

** Contact AWIP for Custom Sizes

† Thermal values as tested per ASTM C518

± Per EPD based on TRACI method from cradle to gate(A1-A3). Lower range based on 2" 26/26 gauge panel. Higher limit based on 6" 22/22 gauge panel. Not all profiles are available in these specific configurations, contact AWIP for more information.

Testing & Approvals

| Category | Test | Test Title | Results |
|-------------------|--------------|--|---|
| Fire | FM4880 | Class 1 Fire Rating of Insulated Wall, Ceiling and Roof Panels | Passed: Class 1 Fire Rating of Building Panels or Interior Finish Material |
| | NFPA 286 | Room Corner Test | Pass Maximum of 6" |
| | ASTM E84 | Surface Burning Characteristics of Building Materials | Flame Spread Index: 25 or less Smoke Developed Index: 450 or less |
| | ASTM E108 | Roof Coverings Fire Test | Pass** |
| | CAN/ULC S126 | Fire Spread Under Roof | Pass |
| | CAN/ULC S138 | Room Corner Test | Pass* |
| Air Infiltration | ASTM E1680 | Air Infiltration | <0.01 cfm/ft ² @ 12 PSF*** |
| Water Penetration | ASTM E1646 | Water Penetration | No leakage at 20 PSF*** |
| Structural | FM 4471 | FM Class 1 Panel Roof | Pass. See RoofNav for rated assemblies. |
| | ASTM E1592 | Structural Performance for Sheet Metal and Sidings Systems by Uniform Static Air Pressure Difference | See load tables |
| Thermal | ASTM C518 | Steady-State Thermal Transmission Properties by Means of the Heat-Flow Meter Apparatus | "Nominal R-value of 7.2 [hr·ft ² ·°F/Btu] per inch at 75°F mean temperature and 8.2 [hr·ft ² ·°F/Btu] per inch at 35°F mean temperature |
| Code Approvals | IAPMO | Various Building Codes | ER-301 |
| | FBC | Florida Building Code | FL14700 |
| | TDI | Texas Department of Insurance | RC-684 |

*Not available for 3-1/4"

**Installation into steel supports only

***Tested at Flat/no roof slope



Scan for the most current product information

1 (888) 970-AWIP (2947)
awipanel.com
sales@awipanel.com



All Weather
Insulated Panels