



**ALL WEATHER  
INSULATED PANELS**

INNOVATIVE.  
ADAPTABLE.  
ENERGY EFFICIENT.

# HE40A

## Product Data Sheet AdobeTexture™ Wall Panels



AdobeTexture™ wall panels offer a matte finish, multi-textured profile and finish that simulates a troweled stucco-like appearance - without the need for additional factory- or field-applied stucco coatings.

### FEATURES AND BENEFITS

- Proprietary breakthrough technology integrates a stucco look and texture into insulated wall panels.
- Eliminates the need for sprayed elastomeric coating applications or multi-step field-applied or additional factory-applied stucco coating.
- Matching AdobeTexture™ trim & finishing system for a clean, continuous look and feel.
- The standard interior metal surface is 26ga Imperial White.
- Same easy, economical installation as standard IMP wall panels - Arrives on site in one piece for a simple one-step installation.
- 25 yr limited paint warranty against chalking, fading and loss of adhesion.

### PRODUCT PARAMETERS

Panel Thickness:			
2"	2.5"	3"	4"
Insulating Values (R):**			
16	20	24	32

**Panel Width:** 40"

**Panel Length:** from 8' to 40' maximum.

**Insulation Material:** CFC-free foamed-in-place polyisocyanurate foam 2.1 to 2.5 pcf density.

**Joint Configuration:** offset tongue and groove with concealed fastener.


**Metal facings:** 26ga galvanized steel

**Coatings:** patented AdobeTexture™ system.

**Accessories:** fasteners, concealed fastener clips, sealants, brake formed flashings.

*AdobeTexture™ finish is available in Sandstone, Surrey Beige, Pearl Gray and Regal White only.*

*Available in fire 1-hour rated panel: HE40A-F (4.5" R-32)*

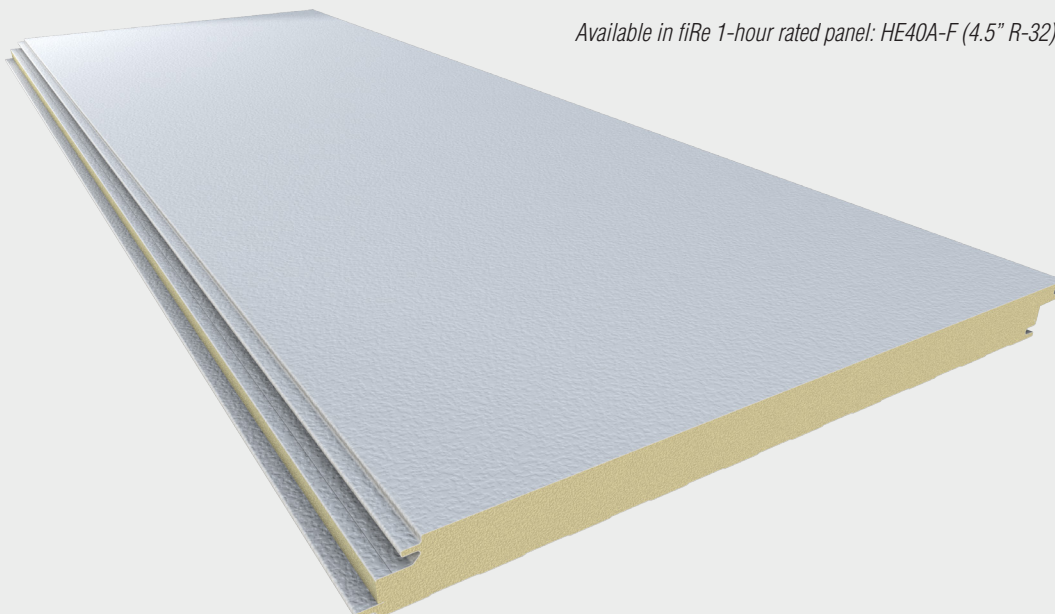

### TESTED & APPROVED

*All Weather Insulated Panels' products have been extensively tested under a variety of North American standards:*

- FM 4880:** Class 1 Fire Rating
- FM 4881:** Class 1 Exterior Wall System
- CAN/ULC S101:** Fire Endurance
- CAN/ULC S134:** Fire Test of Exterior Wall Assemblies
- CAN/ULC S127:** Flammability
- ASTM C518/C1363:** Thermal Transmission
- ASTM E283:** Air Infiltration
- ASTM E331:** Water Penetration
- ASTM E72:** Structural Strength
- ASTM E84:** Flame Spread
- AAMA 501.1:** Air/Water Infiltration

**Miami-Dade County Product Control Approved**

**FLORIDA APPROVED**



*\*\*R-Value tested in accordance with ASTM C518/C1363 at 40°F mean temperature, adjusted for a windspeed of 15 mph.*

### U.S.A

929 Aldridge Rd. Vacaville, CA 95688  
15000 Panatella Pkwy Little Rock, AR 72206  
1-888-970-AWIP (2947)  
**awipanel.com**