

NOTE: FIELD REMOVE FOAM AND LINER AT CUTBACK.

FIELD-FILL W/ COMPRESSIBLE INSULATION
(NOT BY IMP SUPPLIER)

SR_ INSIDE CLOSURE STRIP
W/ $\frac{3}{4}$ " x $\frac{3}{32}$ " BUTYL TAPE
SEALANT AT TOP & BOTTOM

$\frac{1}{4}$ -14 x 0.88" HWH DP1 6" O/C


"LE_ S" LOW EAVE TRIM

POP RIVET 12" O/C

"WC-01" PANEL CLIP W/
($\frac{1}{4}$ - 14 x _ HWH DP3 W/O
WASHER AT PANEL JOINT

BUTYL SEALANT AT
VERTICAL JOINT

EAVE STRUT
(NOT BY IMP SUPPLIER)

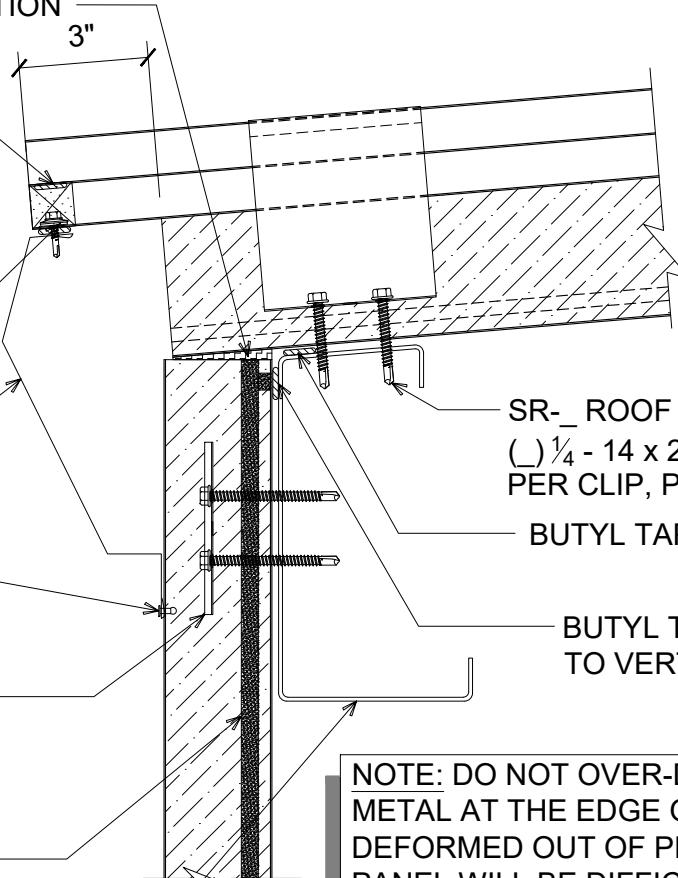


SR_ ROOF PANEL CLIP W/
($\frac{1}{4}$ - 14 x 2" HWH DP3 W/O WASHER,
PER CLIP, PER PANEL AT EAVE STRUT

BUTYL TAPE SEALANT

BUTYL TAPE SEALANT (MARRY
TO VERTICAL SEALANT)

NOTE: DO NOT OVER-DRIVE FASTENERS. IF THE
METAL AT THE EDGE OF THE PANEL IS
DEFORMED OUT OF PLANE, THE ADJACENT
PANEL WILL BE DIFFICULT TO ENGAGE AND WILL
NOT SEAM. AFTER SR CLIP HAS BEEN INSTALLED
OVER MALE LEG OF STANDING SEAM PANEL,
PRE-CRIMP, USING $\frac{1}{2}$ " HAND CRIMPING TOOL.

CLICK HERE



GUTTERLESS EAVE

(SECTION VIEW)

DETAIL: GUTTERLESS EAVE
APPLICATION: SR ROOF COMMERCIAL & INDUSTRIAL
AWIP DETAIL NUMBER: SRR-ACH-GE-001

929 ALDRIDGE ROAD
VACAVILLE, CA 95688
TEL: (707) 359-2280
FAX: (707) 359-2286
WWW.AWIPANELS.COM



All Weather
Insulated Panels

AWIP

DATE: 02/09/26
SHEET: 1
OF 1
DRAWN BY: MMF